




comm@antideflagranti.com

**PRESSACAVI A SINGOLA TENUTA PER CAVO NON ARMATO SERIE “PNS”
SINGLE SEAL CABLE GLANDS FOR NOT ARMoured CABLE SERIES “PNS”**

MODO DI PROTEZIONE - PROTECTION MODE:
I M2, EEx d I, IP66 (Amb.temperature -50°C to +110°C)

CERTIFICATO - CERTIFICATE: ATEX, GOST-R

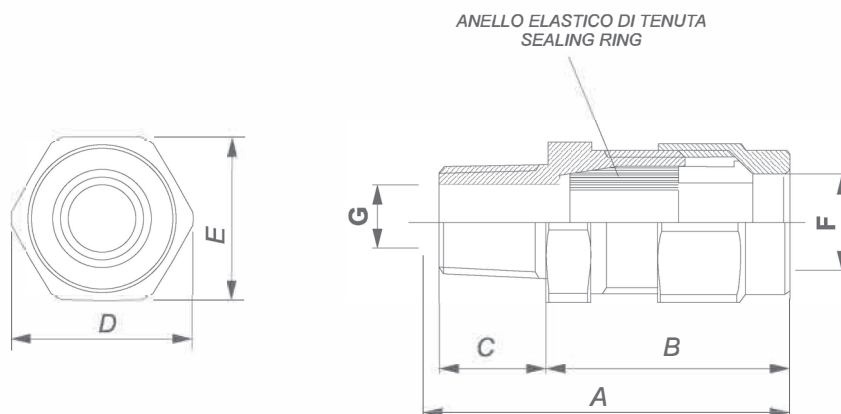

TIPO TYPE	Grandezza Size*	Diametro cavo Cable diameter	Codice gommino Ring code	A mm	B mm	C mm	D mm	E mm	F mm	G mm
PNS 1	M20-1/2"	6-9 9-12	1 A1 1 A2	67	44	20	33	30	18	10,5
PNS 2	M25-3/4"	6-9 9-12 11-14 14-17	2 A1 2 A2 2 A3 2 A4	67	44	20	40	36	24	15
PNS 3	M32-1"	14-17 17-20 20-23	3 A1 3 A2 3 A3	75	47	25	49	44	30	21
PNS 5	M50-1" ½	23-26 26-29 29-32 32-36	5 A2 5 A3 5 A4 5 A5	75	47	25	62	56	43	34
PNS 6	M63-2"	36-39 39-42 42-46	6 A2 6 A3 6 A4	76	48	25	78	70	57	47
PNS 7	M75-2"½	44-48 48-52 52-56 56-60	7 A2 7 A3 7 A4 7 A5	83	48	32	97	87	69	58
PNS 8	M80-3"	56-60 59-63 63-67 67-71	8 A4 8 A5 8 A6 8 A7	83	48	32	108	97	79	69

*Filettature/Threads: GAS UNI6125, NPT, ISO metric.

comm@antideflagranti.com