

ETH / 1 FLASH TYPICAL	Ex db IIB+H2 Gb Ex tb IIIC Db II2GD			T5 T100°C	 -20°C
	Ex db IIC Gb Ex tb IIIC Db II2GD				 +60°C
COMBINATIONS BEACON SOUNDER	zone 1	zone 2	DIRECTIVE 2014/34/UE	T6 T85°C	 -20°C
COMBINAZIONI OTTICO ACUSTICA	zone 21	zone 22			
			IP66		

Caratteristiche: Esempi tipici di combinazione OTTICO&ACUSTICA a normativa ATEX con scatola morsettiera.

Features: Typical examples LIGHT&SOUND combinations a new standard ATEX with terminals box.

ETH / 1 FLASH

TIPICO 2 / TYPICAL 2
ETH20MD 4W + EVA50
+ JBOX



TIPICO 1 / TYPICAL 1
ETH20MD 4W + EVA50
+ JBOX

TIPICO 3 / TYPICAL 3
ETH20MD 10W + EVA50 + JBOX



TIPICO 4 / TYPICAL 4
1 ETH20MD 4W + 2 EVA50 + JBOX



TIPICO 5 / TYPICAL 5
1 ETH20MD 10W + 2 EVA50 + JBOX



TIPICO 6 / TYPICAL 6
1 ETH20MD 4W + 3 EVA50 + JBOX



TIPICO 7 / TYPICAL 7
1 ETH20MD 10W + 3 EVA50 + JBOX



ETH / 2 FLASH TYPICAL	Ex db IIB+H2 Gb Ex tb IIIC Db II2GD			T5 T100°C	 -20°C
	Ex db IIC Gb Ex tb IIIC Db II2GD				 +60°C
COMBINATIONS BEACON SOUNDER	zone 1	zone 2	DIRECTIVE 2014/34/UE	T6 T85°C	 -20°C
COMBINAZIONI OTTICO ACUSTICA	zone 21	zone 22			
			IP66		

Caratteristiche: Esempi tipici di combinazione OTTICO-ACUSTICA a normativa ATEX con scatola morsettiera.

Features: Typical examples LIGHT&SOUND combinations a new standard ATEX with terminals box.

ETH / 2 FLASH


TIPICO 1 / TYPICAL 1
1 ETH20MD 4W + 3 EVA50 + JBOX




TIPICO 2 / TYPICAL 2
1 ETH20MD 10W + 3 EVA50 + JBOX



TIPICO 3 / TYPICAL 3
1 ETH20MD 4W + 2 EVA50 + JBOX

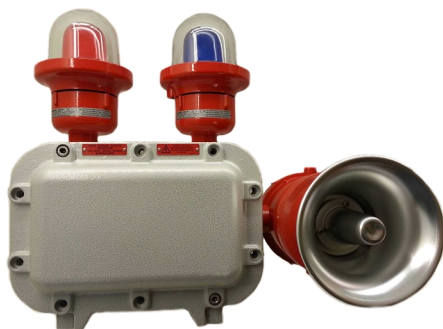

TIPICO 4 / TYPICAL 4
1 ETH20MD 10W + 2 EVA50 + JBOX

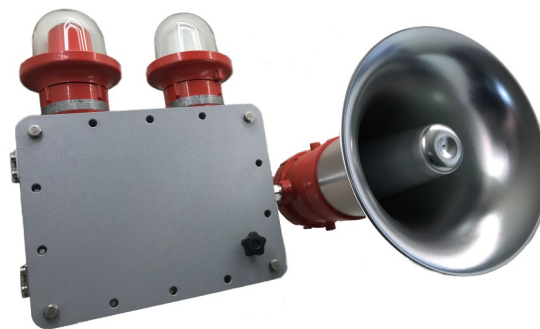

TIPICO 5 / TYPICAL 5
1 ETH20MD 10W + 2 EVA + JBOX



TIPICO 6 / TYPICAL 6
1 ETH20MD 4W + 2 EVA + JBOX



ETH / 3 FLASH TYPICAL	Ex db IIB+H2 Gb Ex tb IIIC Db II2GD			T5 T100°C	 -20°C
	Ex db IIC Gb Ex tb IIIC Db II2GD				 +60°C
COMBINATIONS BEACON SOUNDER	zone 1	zone 2	DIRECTIVE 2014/34/UE	T6 T85°C	 -20°C
COMBINAZIONI OTTICO ACUSTICA	zone 21	zone 22			
			IP66		

Caratteristiche: Esempi tipici di combinazione OTTICO-ACUSTICA a normativa ATEX con scatola morsettiera.


Features: Typical examples LIGHT&SOUND combinations a new standard ATEX with terminals box.

ETH / 3 FLASH

TIPICO 1 / TYPICAL 1
1 ETH20MD 10W + 3 EVA50 + JBOX



TIPICO 2 / TYPICAL 2
1 ETH20MD 4W + 3 EVA50 + JBOX

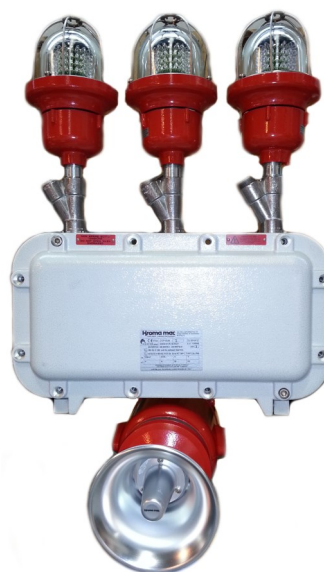

TIPICO 3 / TYPICAL 3
2 ETH20MD 10W + 2 EVA50 + JBOX



TIPICO 4 / TYPICAL 4
1 ETH20MD 4W + JBOX SS Exe



TIPICO 5 / TYPICAL 5
1 ETH20MD 10W + 3 EVA50 + JBOX + PLATE



COMBINAZIONE COMBINATION	TIPICO TYPICAL	MODELLO SIRENA MODEL SOUNDER	MODELLO LAMPADA MODEL BEACON	POTENZA LAMPADA EFFECTIVE INTENSITY	TENSIONE LAMPADA SIRENA VOLTAGE BEACON SOUNDER	COLORE GEMME COLOR SIGNALING LAMP	NUMERO LAMPADA SIRENE NUMBER BEACON SOUNDER	N. TERMINAL JBOX
ETH1/FLASH	(1)	ETH20MD(4W) ETH20MD(32-4W)	EVA(50) EVA(100C) EVA(200C)	(6J) (16J) (21J)	12V 24VAC 24VDC 48VAC 48VDC 110VAC 110VDC 230VAC	(R) Red (Y) yellow (A) orange (G) green (BL) blue (W) white	1	4 2,5mmq
	(2)						1	ST26 1x3/4
	(3)	ETH20MD(10W) ETH20MD(32-10W)					2	6 2,5mmq
	(4)	ETH20MD(4W) ETH20MD(32-4W)					1	ST26 1x3/4
	(5)	ETH20MD(10W) ETH20MD(32-10W)					3	8 2,5mmq
	(6)	ETH20MD(4W) ETH20MD(32-4W)					1	ST26 1x3/4
	(7)	ETH20MD(10W) ETH20MD(32-10W)						
ETH2/FLASH	(1)	ETH20MD(4W) ETH20MD(32-4W)	EVA(50) EVA(100C) EVA(200C)	(6J) (16J) (21J)	12V 24VAC 24VDC 48VAC 48VDC 110VAC 110VDC 230VAC	(R) Red (Y) yellow (A) orange (G) green (BL) blue (W) white	3	... 2,5mmq To be defined
	(2)	ETH20MD(10W) ETH20MD(32-10W)					1	GUB To be defined
	(3)	ETH20MD(4W) ETH20MD(32-4W)					2	... 2,5mmq To be defined
	(4)	ETH20MD(10W) ETH20MD(32-10W)					1	GUB/EJB To be defined
	(5)	ETH20MD(10W) ETH20MD(32-10W)						
	(6)	ETH20MD(4W) ETH20MD(32-4W)						
ETH3/FLASH	(1)	ETH20MD(4W) ETH20MD(32-4W) ETH20MD(10W) ETH20MD(32-10W)	EVA(50) EVA(100C) EVA(200C)	(6J) (16J) (21J)	12V 24VAC 24VDC 48VAC 48VDC 110VAC 110VDC 230VAC	(R) Red (Y) yellow (A) orange (G) green (BL) blue (W) white	3	... 2,5mmq To be defined
							1	GUB To be defined
	(2)						3	... 2,5mmq To be defined
	(3)	ETH20MD(4W) ETH20MD(32-4W) ETH20MD(10W) ETH20MD(32-10W)					1	EJB To be defined
	(4)						3	... 2,5mmq To be defined
	(5)						2	EJB To be defined
							0	... 2,5mmq To be defined
							1	GWY To be defined
							3	... 2,5mmq To be defined
							1	GUB To be defined
ESEMPIO ORDINE ORDER EXAMPLE	ETH1/FLASH	(1)	(4W)	(50)	(6J)	24VDC	(R)	



COMBINAZIONE COMBINATION	TIPICO TYPICAL	MODELLO SIRENA MODEL SOUNDER	MODELLO LAMPADA MODEL BEACON	POTENZA LAMPADA EFFECTIVE INTENSITY	TENSIONE LAMPADA SIRENA VOLTAGE BEACON SOUNDER	COLORE GEMME COLOR SIGNALING LAMP	NUMERO LAMPADA SIRENA NUMBER BEACON SOUNDER	N. TERMINAL JBOX
ETH1/LED	(1)	ETH20MD(4W) ETH20MD(32-4W)	EVA(50)	(L40) (L60) (L80) (L100)	12V 24VAC 24VDC 48VAC 48VDC 110VAC 110VDC 230VAC	(R) Red (Y) yellow (A) orange (G) green (BL) blue (W) white	1	4 2,5mmq
	(2)						1	ST26 1x3/4
	(3)	ETH20MD(10W) ETH20MD(32-10W)					2	6 2,5mmq
	(4)	ETH20MD(4W) ETH20MD(32-4W)					1	ST26 1x3/4
	(5)	ETH20MD(10W) ETH20MD(32-10W)					3	8 2,5mmq
	(6)	ETH20MD(4W) ETH20MD(32-4W)					1	ST26 1x3/4
	(7)	ETH20MD(10W) ETH20MD(32-10W)						
ETH2/LED	(1)	ETH20MD(4W) ETH20MD(32-4W)	EVA(50)	(L40) (L60) (L80) (L100)	12V 24VAC 24VDC 48VAC 48VDC 110VAC 110VDC 230VAC	(R) Red (Y) yellow (A) orange (G) green (BL) blue (W) white	3	... 2,5mmq To be defined
	(2)	ETH20MD(10W) ETH20MD(32-10W)					1	GUB To be defined
	(3)	ETH20MD(4W) ETH20MD(32-4W)					2	... 2,5mmq To be defined
	(4)	ETH20MD(10W) ETH20MD(32-10W)					1	GUB/EJB To be defined
	(5)	ETH20MD(10W) ETH20MD(32-10W)						
	(6)	ETH20MD(4W) ETH20MD(32-4W)						
ETH3/LED	(1)	ETH20MD(4W) ETH20MD(32-4W) ETH20MD(10W) ETH20MD(32-10W)	EVA(50)	(L40) (L60) (L80) (L100)	12V 24VAC 24VDC 48VAC 48VDC 110VAC 110VDC 230VAC	(R) Red (Y) yellow (A) orange (G) green (BL) blue (W) white	3	... 2,5mmq To be defined
							1	GUB To be defined
	(2)						3	... 2,5mmq To be defined
	(3)	ETH20MD(4W) ETH20MD(32-4W) ETH20MD(10W) ETH20MD(32-10W)					1	EJB To be defined
	(4)						3	... 2,5mmq To be defined
	(5)						2	EJB To be defined
							0	... 2,5mmq To be defined
							1	GWY To be defined
							3	... 2,5mmq To be defined
							1	GUB To be defined
ESEMPIO ORDINE ORDER EXAMPLE	ETH1/LED	(1)	(4W)	(50)	(L40)	24VDC	(R)	(F) FIXED (I) INTERMITTENT (R) ROTATING

