

NP Series

The Nipples Series NP are used to joint together equipments or other reducers with female entry.

Features

Material used: nickel plated brass CW614N

Operating temperature:-60°C up to 180°C

NPT thread: from 3/8” up to 3”

ISO 262 thread: from M16x1.5 up to M90x1.5


Degree of protection: IP66



ATEX & IECEx Equipment Data		
Gas	Group II Zone 1	Ex db I Mb Ex db IIC Gb Ex eb IIC Gb
Dust	Group II Zone 21	Ex tb IIIC Db IP66
ATEX Certificate		IECEx Certificate
INERIS 14 ATEX 0029X		IECEx INE 14.0038X

Options available

- Stainless steel AISI 316L construction
- Stainless steel AISI 317L construction (available on demand)
- CW724R Brass (Lead <0,1%) (available on demand)

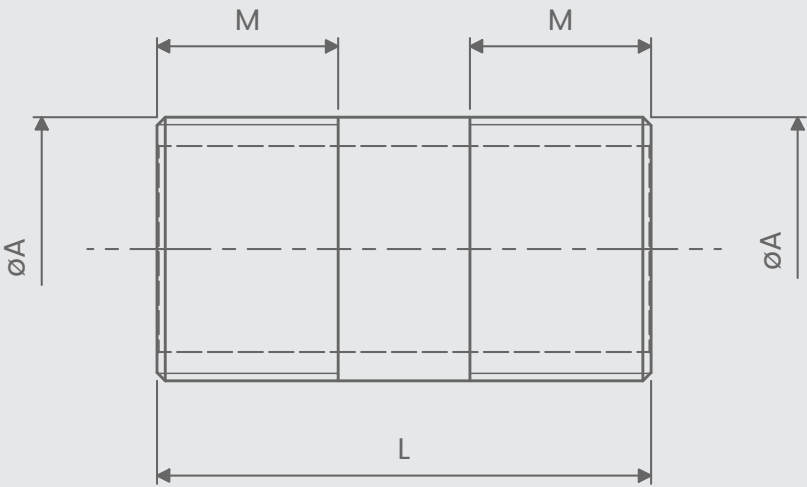

Code	ØA	M	L
NP38B	3/8" NPT	16	40
NP1B	1/2" NPT	18	50
NP2B	3/4" NPT	18	50
NP3B	1" NPT	23	60
NP4B	1.1/4" NPT	23	60
NP5B	1.1/2" NPT	23	60
NP6B	2" NPT	23	60
NP7B	2.1/2" NPT	28	70
NP8B	3" NPT	28	70
NP16B	M16x1.5	16	40
NP20B	M20x1.5	16	50
NP25B	M25x1.5	16	50
NP32B	M32x1.5	16	60
NP40B	M40x1.5	18	60
NP50B	M50x1.5	18	60
NP63B	M63x1.5	18	60
NP75B	M75x1.5	20	70
NP90B	M90x1.5	20	70